


Cutting & Bending Machines for concrete Via Achille Grandi - 20056 Trezzo s/A Phone: +39.2.90.93.97.35 - Fax: +3 Mailto: info@simpedil.it - http://w

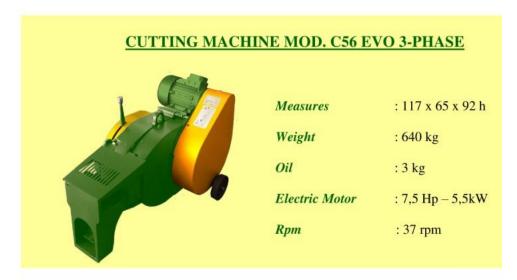

Cutting capability	$R. = 65 \text{ Kg.} / \text{mm}^2$			R. = 85  Kg./	
	1 Ø 48	2 Ø 34	3 Ø 26	1 Ø 42	2 Ø 32

## STANDARD EQUIPMENT

- 1 set composed of 2 blades, already fitted on machine
- This special Screw Locator can easily be regulated according to the bar diameter and quantity to be cut. The Screw Locator permits a perfect alignment of one or more bars ag blade and an exact perpendicular cut.
- Centralized lubrication system. Thanks to the new construction system, the parts that need lubrication are now easily reached through a unique lubricating point.
- · Mechanical lever and pedal.
- · Magnetothermic switch

## \*\*\*TECHNICAL DATA\*\*\*

- Completely new projected machine body in mono block made of Spheroid C
- · Gearing in cemented steel;
- · Reinforced mechanical parts for a better resistance and performance of the m
- Increased cutting capacity;
- · Equipped with screw locator for bars alignment.



SCREW LOCATOR



LUBRICATING SYSTEM